


## Ducts

## PRODUCT SHEET



KC-03.1 SPS  
Recommended controller

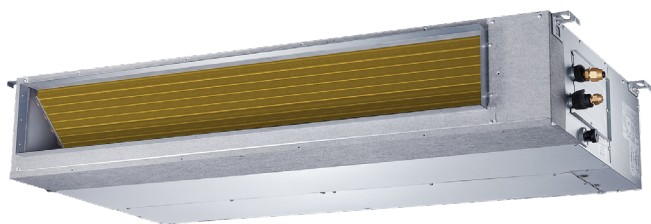


Product certified by:



## FEATURES

Model	KPDA-35 DVR13 / KPDA-35 DVR13-X
Cooling capacity	3,52 kW
Cooling power input	1.053 W
Heating capacity	3,81 kW
Heating power input	1.038 W
ErP Classification cold/heat	A++ / A+
Airflow (indoor)	350/500/660 m³/h
Max. static pressure	60 Pa
Sound pressure (indoor)	29,80/33,50/36 dB(A)
Airflow (outdoor)	2.200 m³/h
Sound pressure (outdoor)	53,60 dB(A)
Power supply	220-240 V / 1 / 50 Hz
Max. input	9 A
Power wiring (indoor)	With communication
Power wiring (outdoor)	(2+T)x1,50 mm²
Communication wiring	(3+T)x1 mm²

## WIRING DIAGRAM

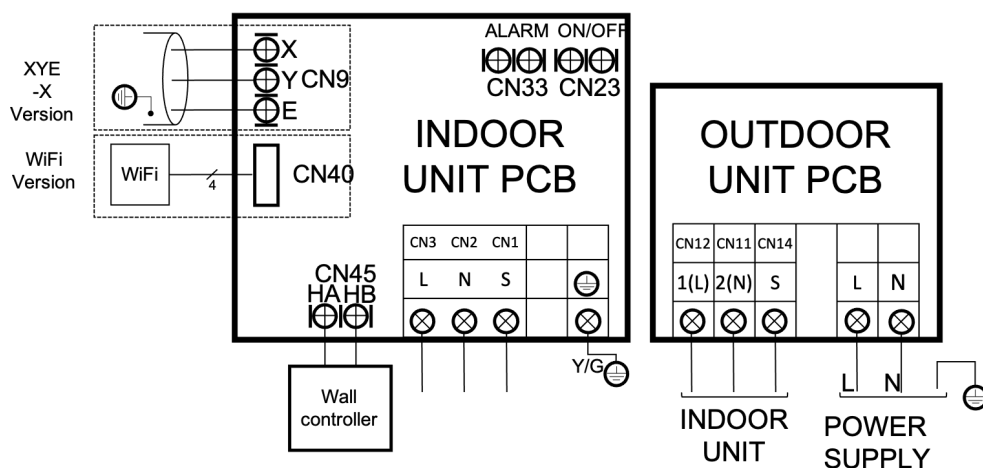


NOTES:

(1) The data and specifications present in this sheet may vary without notice.

(2) The images on this sheet are indicative and may be different from the final machine.


## COOLING CONNECTION

Model	KPDA-35 DVR13 / KPDA-35 DVR13-X	
Refrigerating pipes	$\varnothing 1/4'' / \varnothing 3/8''$	
Refrigerant charge / Additional charge	0,72 kg / 0,012 kg	
Indoor drain pipe	$\varnothing 25$ mm	
Max. pipe length (A)	25 m	
Max. level difference (B)	10 m	

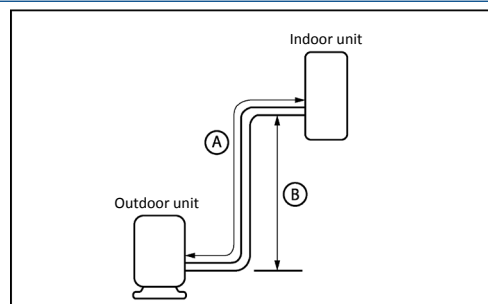


## DIMENSIONS & WEIGHT INDOOR

Model	KPD-35 DR13 / KPD-35 DR13-X
Width	700 mm
Height	200 mm
Depth	506 mm
Weight	17,80 kg

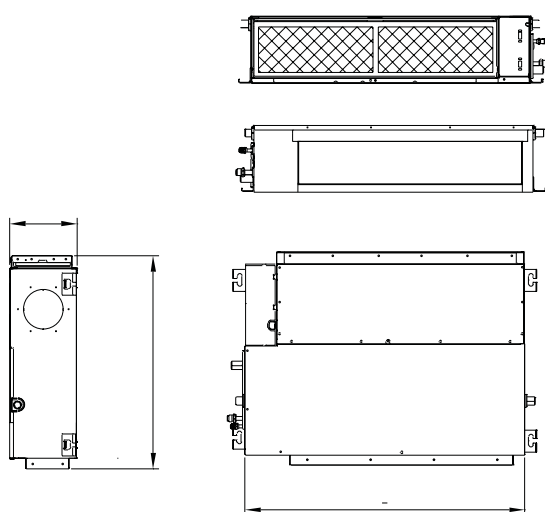

## DIMENSIONS & WEIGHT OUTDOOR

Model	KUE-35 DVR13
Width	765 mm
Height	555 mm
Depth	303 mm
Weight	26,60 kg

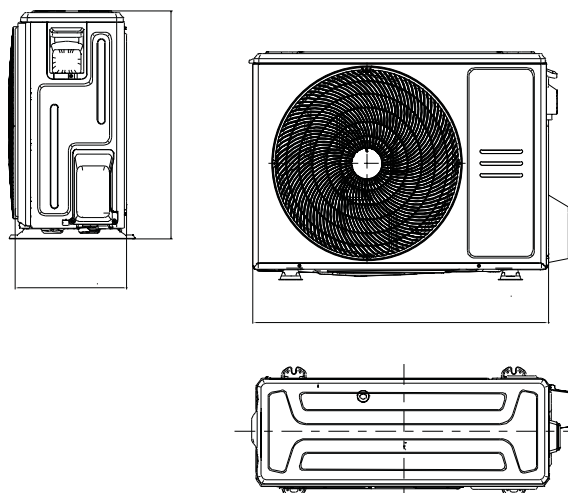

## INSTALLATION

