


Ducts

PRODUCT SHEET



KC-03.1 SPS
Recommended controller

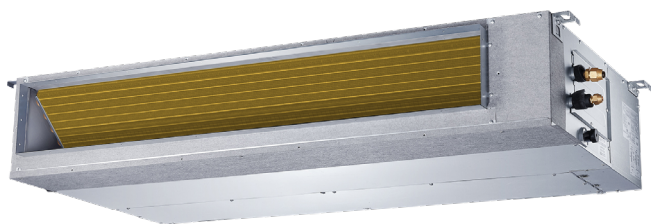


Product certified by:



FEATURES

Model	KPDA-52 DVR13 / KPDA-52 DVR13-X
Cooling capacity	5,28 kW
Cooling power input	1.530 W
Heating capacity	5,57 kW
Heating power input	1.510 W
ErP Classification cold/heat	A++ / A+
Airflow (indoor)	420/670/870 m³/h
Max. static pressure	100 Pa
Sound pressure (indoor)	26/29,80/35 dB(A)
Airflow (outdoor)	2.100 m³/h
Sound pressure (outdoor)	56 dB(A)
Power supply	220-240 V / 1 / 50 Hz
Max. input	13,50 A
Power wiring (indoor)	With communication
Power wiring (outdoor)	(2+T)x1,50 mm²
Communication wiring	(3+T)x1 mm²

WIRING DIAGRAM

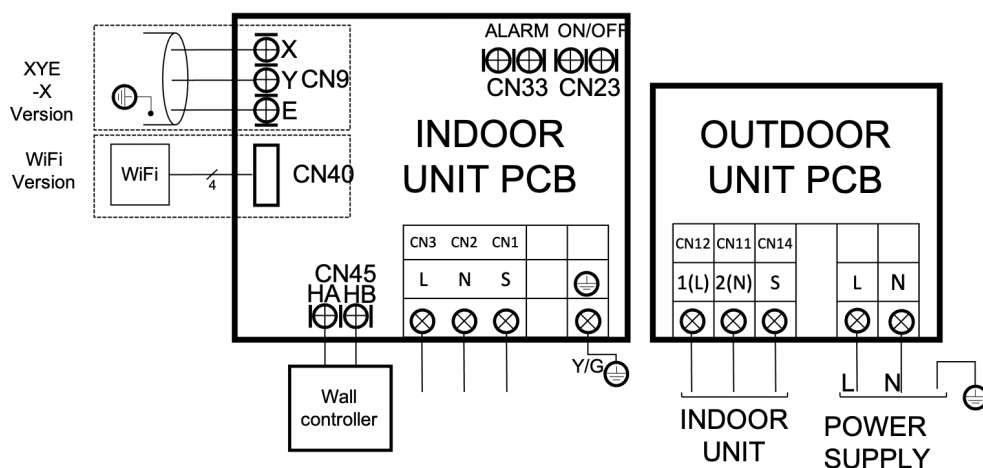


NOTES:

(1) The data and specifications present in this sheet may vary without notice.

(2) The images on this sheet are indicative and may be different from the final machine.


COOLING CONNECTION

Model	KPDA-52 DVR13 / KPDA-52 DVR13-X	
Refrigerating pipes	$\varnothing 1/4'' / \varnothing 1/2''$	
Refrigerant charge / Additional charge	1,15 kg / 0,012 kg	
Indoor drain pipe	$\varnothing 25$ mm	
Max. pipe length (A)	30 m	
Max. level difference (B)	20 m	

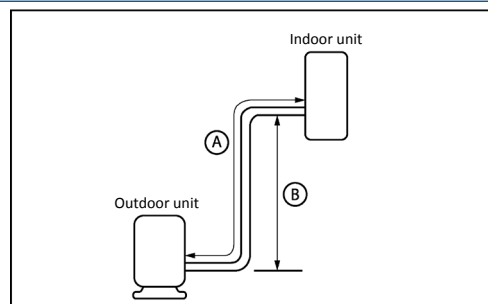


DIMENSIONS & WEIGHT INDOOR

Model	KPD-52 DR13 / KPD-52 DR13-X
Width	880 mm
Height	210 mm
Depth	674 mm
Weight	24,40 kg

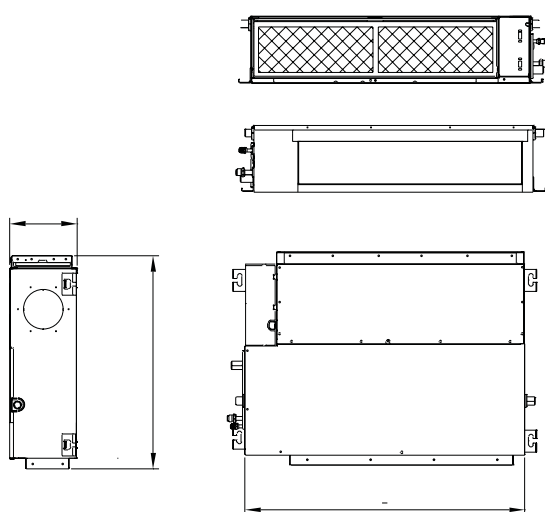

DIMENSIONS & WEIGHT OUTDOOR

Model	KUE-52 DVR13
Width	805 mm
Height	554 mm
Depth	330 mm
Weight	32,50 kg

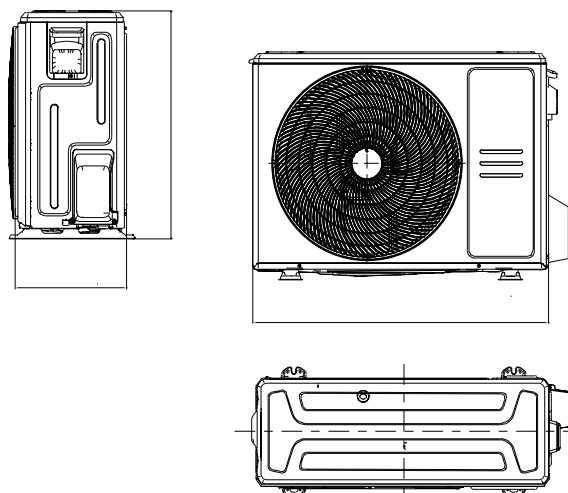

INSTALLATION

