



SuperSlim Cassette 840x840

PRODUCT SHEET




























FEATURES

Model KCISA-105 DTR13			
Model	KCISA-IUS DI KIS		
Cooling capacity	10,55 kW		
Cooling power input	4.000 W		
Heating capacity	11,14 kW		
Heating power input	3.000 W		
ErP Classification cold/heat	A++ / A+		
Airflow (indoor)	1.300/1.530/1.700 m³/h		
Sound pressure (indoor)	46/49/51 dB(A)		
Airflow (outdoor)	4.000 m³/h		
Sound pressure (outdoor)	63 dB(A)		
Power supply	380-415 V / 3 / 50 Hz		
Max. input	10 A		
Power wiring (indoor)	With communication		
Power wiring (outdoor)	(4+T)x2,50 mm ²		
Communication wiring	(3+T)x1 mm²		

WIRING DIAGRAM

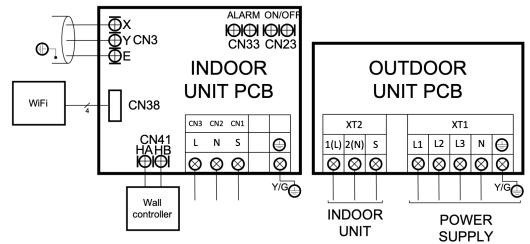







COOLING CONNECTION

Model			
Refrigerating pipes	Ø3/8" / Ø5/8"		
Refrigerant charge / Additional charge	2,40 kg / 0,024 kg		
Indoor drain pipe	Ø32		
Max. pipe length (A)	75 m		
Max. level difference (B)	30 m		



DIMENSIONS & WEIGHT INDOOR

Model KCIS-105 DR13



Ľ	9	_/	 8 9
			27.2


Weight

27,20 kg

DIMENSIONS & WEIGHT PANEL

Model

KPA4-04B 840x840





DIMENSIONS & WEIGHT OUTDOOR

Model	KUE-105 DTR13
Width	946 mm
Height	810 mm
Depth	410 mm
Weight	80,50 kg

