

SuperSlim Cassette 840x840

PRODUCT SHEET



KID-05 S

Recommended controller




Product certified by:



FEATURES

Model	KCISA-160 DTR13
Cooling capacity	15,24 kW
Cooling power input	5.000 W
Heating capacity	18,17 kW
Heating power input	5.550 W
ErP Classification cold/heat	A++ / A+
Airflow (indoor)	1.650/1.850/2.000 m³/h
Sound pressure (indoor)	49,50/52/54,50 dB(A)
Airflow (outdoor)	7.500 m³/h
Sound pressure (outdoor)	64 dB(A)
Power supply	380-415 V / 3 / 50 Hz
Max. input	14 A
Power wiring (indoor)	With communication
Power wiring (outdoor)	(4+T)x2,50 mm²
Communication wiring	(3+T)x1 mm²

WIRING DIAGRAM

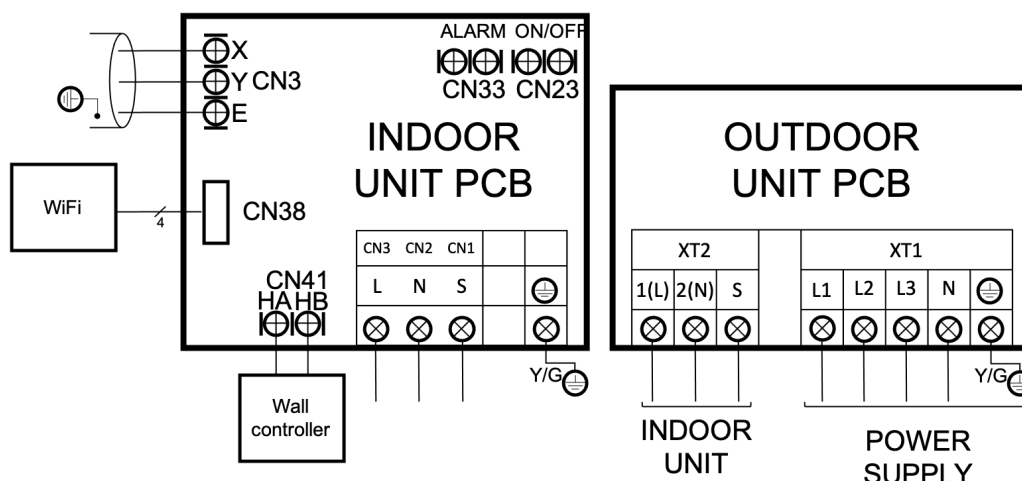


NOTES:

(1) The data and specifications present in this sheet may vary without notice.

(2) The images on this sheet are indicative and may be different from the final machine.

COOLING CONNECTION

Model	KCISA-160 DTR13
Refrigerating pipes	Ø3/8" / Ø5/8"
Refrigerant charge / Additional charge	3 kg / 0,024 kg
Indoor drain pipe	Ø32
Max. pipe length (A)	75 m
Max. level difference (B)	30 m

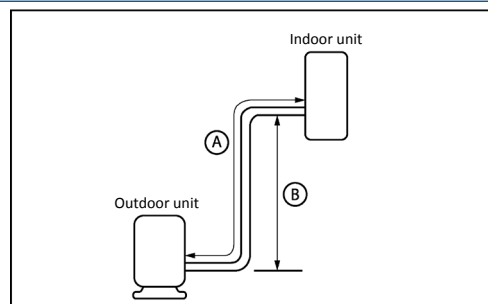

DIMENSIONS & WEIGHT INDOOR


Model	KCIS-160 DR13
Weight	29,30 kg

DIMENSIONS & WEIGHT PANEL

Model	KPA4-04B 840x840
Weight	6 kg

DIMENSIONS & WEIGHT OUTDOOR

Model	KUE-160 DTR13
Width	952 mm
Height	1.333 mm
Depth	415 mm
Weight	107 kg

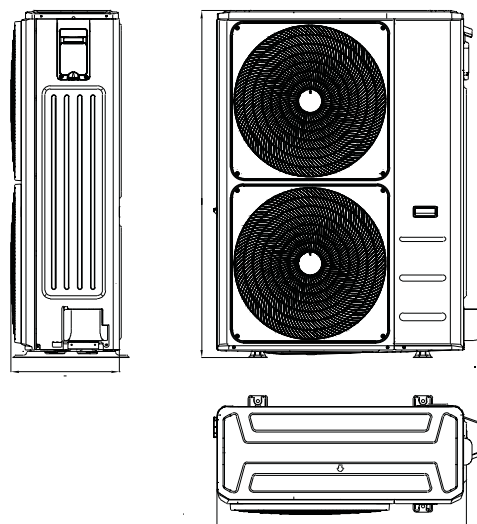

INSTALLATION

